



Leduro.com

CATALOGUE
2018

LED FILAMENT BULBS

E27 / E14



Model code	70103			GLOBE LED FILAMENT	
Power	6.5 W	Lamp base	E27	Ra	>80
Light stream	806 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 95 mm / H 140 mm	EAN code	4750703021494
		Life span	25000 h		



Model code	70101			A60 LED FILAMENT	
Power	6.5 W	Lamp base	E27	Ra	>80
Light stream	806 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 60 mm / H 106 mm	EAN code	4750703022231
		Life span	25000 h		



Model code	70104			A60 LED FILAMENT	
Power	8 W	Lamp base	E27	Ra	>80
Light stream	1055 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 60 mm / H 106 mm	EAN code	4750703023504
		Life span	25000 h		



Model code	70202			G45 LED FILAMENT	
Power	4 W	Lamp base	E27	Ra	>80
Light stream	400 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 45 mm / H 73 mm	EAN code	4750703021487
		Life span	25000 h		



Model code	70201			G45 LED FILAMENT	
Power	4 W	Lamp base	E14	Ra	>80
Light stream	400 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 45 mm / H 78 mm	EAN code	4750703020541
		Life span	25000 h		



Model code	70301			C35 LED FILAMENT	
Power	4 W	Lamp base	E14	Ra	>80
Light stream	400 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 35 mm / H 100 mm	EAN code	4750703022248
		Life span	25000 h		



Model code	70303			C35 LED FILAMENT	
Power	5 W	Lamp base	E14	Ra	>80
Light stream	550 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 35 mm / H 100 mm	EAN code	4750703023498
		Life span	25000 h		



Model code	70302			C35 LED FILAMENT	
Power	4 W	Lamp base	E14	Ra	>80
Light stream	400 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 35 mm / H 115 mm	EAN code	4750703022347
		Life span	25000 h		

LED BULBS

E27 / E14



Model code	21197			GLOBE LED BULB	
Power	15 W	Lamp base	E27	Ra	>80
Light stream	1200 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 120 mm / H 152 mm	EAN code	4750703012041
		Life span	25000 h		



Model code	21215			A65 LED BULB	
Power	15 W	Lamp base	E27	Ra	>80
Light stream	1400 lm	Beam angle	220°	Voltage	220-240 V
Color temperature	3000 K	Size	D 65 mm / H 130 mm	EAN code	4750703022446
		Life span	25000 h		



Model code	21187			A65 LED BULB	
Power	12 W	Lamp base	E27	Ra	>80
Light stream	1000 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 65 mm / H 123 mm	EAN code	4750703995900
		Life span	25000 h		



Model code	21196			A60 LED BULB	
Power	9 W	Lamp base	E27	Ra	>80
Light stream	800 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 60 mm / H 110 mm	EAN code	4750703008570
		Life span	25000 h		



Model code	21184			A50 LED BULB	
Power	6 W	Lamp base	E27	Ra	>80
Light stream	500 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 55 mm / H 114 mm	EAN code	4750703995887
		Life span	25000 h		



Model code	21182			G45 LED BULB	
Power	5 W	Lamp base	E14	Ra	>80
Light stream	400 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 45 mm / H 80 mm	EAN code	4750703995863
		Life span	25000 h		



Model code	21183			G45 LED BULB	
Power	5 W	Lamp base	E27	Ra	>80
Light stream	400 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 45 mm / H 80 mm	EAN code	4750703995870
		Life span	25000 h		



Model code	21177			R63 LED BULB
Power	8 W	Lamp base	E27	>80
Light stream	700 lm	Beam angle	180°	220-240 V
Color temperature	3000 K	Size	D 63 mm / H 105 mm	4750703995825
		Life span	25000 h	



Model code	21169			R50 LED BULB
Power	5 W	Lamp base	E14	>80
Light stream	400 lm	Beam angle	360°	220-240 V
Color temperature	3000 K	Size	D 50 mm / H 86 mm	4750703995627
		Life span	25000 h	



Model code	21188			C35 LED BULB
Power	5 W	Lamp base	E14	>80
Light stream	400 lm	Beam angle	180°	220-240 V
Color temperature	2700 K	Size	D 35 mm / H 99 mm	4750703995917
		Life span	25000 h	



Model code	21130			C35 LED BULB
Power	3 W	Lamp base	E14	>80
Light stream	200 lm	Beam angle	180°	220-240 V
Color temperature	2700 K	Size	D 35 mm / H 99 mm	4750703022255
		Life span	25000 h	

LED BULBS

**GU10 /
GU5.3 MR16 / AR111**



Model code	21200			PAR16 LED BULB
Power	7.5 W	Lamp base	GU10	>80
Light stream	600 lm	Beam angle	60°	220-240 V
Color temperature	3000 K	Size	D 50 mm / H 50 mm	4750703023481
		Life span	25000 h	



Model code	21194			PAR16 LED BULB
Power	7 W	Lamp base	GU10	>80
Light stream	600 lm DIM	Beam angle	60°	220-240 V
Color temperature	3000 K	Size	D 50 mm / H 50 mm	4750703023320
		Life span	25000 h	



Model code	21192			PAR16 LED BULB
Power	5 W	Lamp base	GU10	>80
Light stream	400 lm	Beam angle	100°	220-240 V
Color temperature	3000 K	Size	D 50 mm / H 50 mm	4750703995955
		Life span	25000 h	



Model code	21174			PAR16 LED BULB
Power	4 W	Lamp base	GU10	Ra
Light stream	300 lm	Beam angle	90°	>80
Color temperature	3000 K	Size	D 50 mm / H 50 mm	Voltage
		Life span	25000 h	220-240 V
				EAN code
				4750703995689



Model code	21170			PAR16 LED BULB
Power	3 W	Lamp base	GU10	Ra
Light stream	250 lm	Beam angle	90°	>80
Color temperature	3000 K	Size	D 50 mm / H 50 mm	Voltage
		Life span	25000 h	220-240 V
				EAN code
				4750703995634



Model code	21179			MR16 LED BULB
Power	3 W	Lamp base	GU5.3	Ra
Light stream	250 lm	Beam angle	100°	>80
Color temperature	3000 K	Size	D 50 mm / H 38 mm	Voltage
		Life span	25000 h	AC/DC 12 V
				EAN code
				4750703995849



Model code	21191			MR16 LED BULB
Power	5 W	Lamp base	GU5.3	Ra
Light stream	400 lm	Beam angle	100°	>80
Color temperature	3000 K	Size	D 50 mm / H 38 mm	Voltage
		Life span	25000 h	AC/DC 12 V
				EAN code
				4750703995924



Model code	21096			AR111 LED BULB
Power	14 W	Lamp base	GU10	Ra
Light stream	900 lm	Beam angle	45°	>80
Color temperature	3000 K	Size	D 111 mm / H 62 mm	Voltage
		Life span	25000 h	220-240 V
				EAN code
				4750703023337



Model code	21094			AR111 LED BULB
Power	14 W	Lamp base	G53	Ra
Light stream	1000 lm	Beam angle	45°	>80
Color temperature	3000 K	Size	D 111 mm / H 62 mm	Voltage
		Life span	25000 h	AC/DC 12 V
				EAN code
				4750703995528

LED BULBS

G9 / G4 / Gx53 / R7S



Model code	21054			LED BULB
Power	5.5 W	Lamp base	G9	Ra
Light stream	500 lm	Beam angle	360°	>80
Color temperature	2700 K	Size	D 16 mm / H 62 mm	Voltage
		Life span	25000 h	220-240 V
				EAN code
				4750703023290



Model code	21053				LED BULB
Power	3.5 W	Lamp base	G9	Ra	>80
Light stream	350 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 16 mm / H 50 mm	EAN code	4750703023283
		Life span	25000 h		



Model code	21057				LED BULB
Power	3.5 W	Lamp base	G9	Ra	>80
Light stream	350 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	2700 K	Size	D 16 mm / H 50 mm	EAN code	4750703023474
		Life span	25000 h		Dimmable LED



Model code	21052				LED BULB
Power	2.5 W	Lamp base	G9	Ra	>80
Light stream	230 lm	Beam angle	300°	Voltage	220-240 V
Color temperature	2700 K	Size	D 16 mm / H 52 mm	EAN code	4750703019422
		Life span	25000 h		



Model code	21056				LED BULB
Power	2.5 W	Lamp base	G4	Ra	>80
Light stream	200 lm	Beam angle	300°	Voltage	AC/DC 12 V
Color temperature	2700 K	Size	D 13 mm / H 37 mm	EAN code	4750703023306
		Life span	25000 h		Dimmable LED



Model code	21051				LED BULB
Power	1.5 W	Lamp base	G4	Ra	>80
Light stream	100 lm	Beam angle	300°	Voltage	AC/DC 12 V
Color temperature	2700 K	Size	D 12 mm / H 37 mm	EAN code	4750703019415
		Life span	25000 h		



Model code	21199				LED BULB
Power	7 W	Lamp base	GX53	Ra	>80
Light stream	600 lm	Beam angle	100°	Voltage	220-240 V
Color temperature	3000 K	Size	D 75 mm / H 28 mm	EAN code	4750703019040
		Life span	25000 h		



Model code	10055				LED BULB
Power	10 W	Lamp base	R7S	Ra	>80
Light stream	1000 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	3000 K	Size	D 22 mm / H 118 mm	EAN code	4750703013895
		Life span	25000 h		



Model code	10053				LED BULB
Power	5 W	Lamp base	R7S	Ra	>80
Light stream	480 lm	Beam angle	360°	Voltage	220-240 V
Color temperature	3000 K	Size	D 18 mm / H 78 mm	EAN code	4750703023313
		Life span	25000 h		

LED LUMINARIES



IP44 / IP20



Model code	95210			NOVA24 LED
Power	24 W	Degree of protection	IP44	Ra
Light stream	1700 lm	Beam angle	120°	>80
Color temperature	4000 K	Size	D 385 mm / H 100 mm	Voltage
UGR	<19	Life span	25000 h	220-240 V
				EAN code
				4750703023412



Model code	95200			NOVA12 LED
Power	12 W	Degree of protection	IP44	Ra
Light stream	800 lm	Beam angle	120°	>80
Color temperature	4000 K	Size	D 260 mm / H 95 mm	Voltage
UGR	<19	Life span	25000 h	220-240 V
				EAN code
				4750703023382



Model code	95220			NOVA SENSOR
Power	12 W	Degree of protection	IP20	Ra
Light stream	800 lm	Beam angle	120°	>80
Color temperature	4000 K	Size	D 260 mm / H 95 mm	Voltage
UGR	<19	Life span	25000 h	220-240 V
				EAN code
				4750703023429



Model code	95240			SUPER NOVA 60
Power	60 W	Degree of protection	IP20	Ra
Light stream	5000 lm	Beam angle	120°	>80
Color temperature	4000 K	Size	D 550 mm / H 65 mm	Voltage
UGR	<19	Life span	25000 h	220-240 V
				EAN code
				4750703023443



Model code	95230			SUPER NOVA 36
Power	36 W	Degree of protection	IP20	Ra
Light stream	2600 lm	Beam angle	120°	>80
Color temperature	4000 K	Size	D 480 mm / H 60 mm	Voltage
UGR	<19	Life span	25000 h	220-240 V
				EAN code
				4750703023436



Model code	31520			LINE20
Power	20 W	Degree of protection	IP20	Ra
Light stream	1800 lm	Beam angle	180°	>80
Color temperature	3000 K	Size	D 1200 mm / H 16 mm	Voltage
		Life span	25000 h	220-240 V
				EAN code
				4750703022293



Model code	31510			LINE10
Power	10 W	Degree of protection	IP20	Ra
Light stream	900 lm	Beam angle	180°	>80
Color temperature	3000 K	Size	D 600 mm / H 16 mm	Voltage
		Life span	25000 h	220-240 V
				EAN code
				4750703022286

RECESSED DOWNLIGHT



IP20



Model code	80001				SQUARE
Base included	GU10	Degree of protection	IP20	EAN code	4750703022361
		Size	82x82 mm	 \emptyset	70 mm



Model code	80002				SQUARE
Base included	GU10	Degree of protection	IP20	EAN code	4750703022385
		Size	92x92 mm	 \emptyset	80 mm




Model code	80003				RING
Base included	GU10	Degree of protection	IP20	EAN code	4750703022354
		Size	D 82 mm	 \emptyset	70 mm



Model code	80004				RING
Base included	GU10	Degree of protection	IP20	EAN code	4750703022378
		Size	D 92 mm	 \emptyset	80 mm



Model code	80005				SQUARE 2
Base included	2 x GU10	Degree of protection	IP20	EAN code	4750703022392
		Size	92x175 mm	 \emptyset	80x165 mm



Model code	80006				SQUARE 3
Base included	3 x GU10	Degree of protection	IP20	EAN code	4750703022408
		Size	92x260 mm	 \emptyset	80x245 mm



Model code	80007				UNO
Base included	GU10	Degree of protection	IP20	EAN code	4750703022450
		Size	D 80 mm / H 21 mm	 \emptyset	70 mm



Model code	80008			UNO
Base included	GU10	Degree of protection	IP20	EAN code
		Size	D 80 mm / H 21 mm	4750703023467
				70 mm

LED FLOODLIGHTS

IP65



Model code	46550			PRO 50
Power	50 W	Degree of protection	IP65	Ra
Light stream	5000 lm	Beam angle	100°	>80
Color temperature	4000 K	Size	235x200x67 mm	Voltage
		Life span	25000 h	85-265 V
				EAN code
				4750703015301



Model code	46530			PRO 30
Power	30 W	Degree of protection	IP65	Ra
Light stream	3000 lm	Beam angle	100°	>80
Color temperature	4000 K	Size	192x172x60 mm	Voltage
		Life span	25000 h	85-265 V
				EAN code
				4750703015295




Model code	36530			EKO 30
Power	30 W	Degree of protection	IP65	Ra
Light stream	2700 lm	Beam angle	100°	>80
Color temperature	4000 K	Size	225x185x55 mm	Voltage
		Life span	25000 h	85-265 V
				EAN code
				4750703022470



Model code	36520			EKO 20
Power	20 W	Degree of protection	IP65	Ra
Light stream	1800 lm	Beam angle	100°	>80
Color temperature	4000 K	Size	180x140x45 mm	Voltage
		Life span	25000 h	85-265 V
				EAN code
				4750703022460

LED PANELS

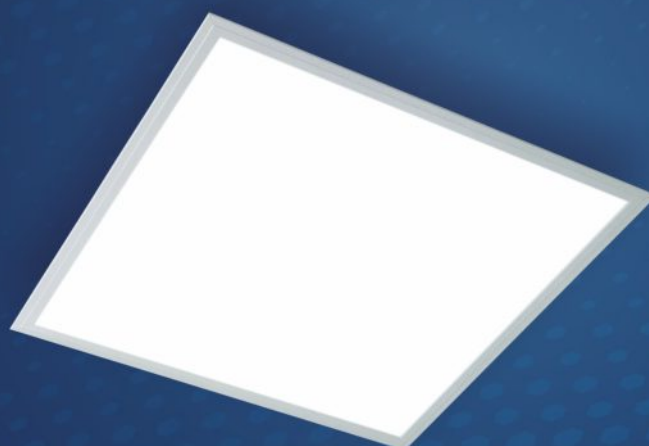

IP20

We produce panels only from high quality materials. Aluminum frame and PMMA diffuser. We offer warranty up to 5 years.



Model code	93600			VISOLUX LED PANEL 60x60	
Power	42 W	Degree of protection	IP20	Ra	>80
Light stream	3600 lm	Beam angle	120°	Voltage	220-240 V
Color temperature	4000 K	Size	595x595x10 mm	EAN code	4750703022491
UGR	<19	Life span	25000 h	Power supply	+



Model code	93601			VISOLUX LED PANEL 60x60	
Power	42 W	Degree of protection	IP20	Ra	>80
Light stream	3600 lm	Beam angle	120°	Voltage	220-240 V
Color temperature	3000 K	Size	595x595x10 mm	EAN code	4750703023269
UGR	<19	Life span	25000 h	Power supply	+



Model code	94200			VISOLUX LED PANEL 60x60	
Power	42 W	Degree of protection	IP20	Ra	>80
Light stream	4200 lm	Beam angle	120°	Voltage	220-240 V
Color temperature	4000 K	Size	595x595x10 mm	EAN code	4750703023276
UGR	<19	Life span	25000 h	Power supply	+

LED PANEL ACCESSORIES



Model code	90000			LED PANEL FIXTURE KIT 3	
LED panel fixture kit 595x595 h1m				EAN code	4750703023528



Model code	90001			LED PANEL FIXTURE KIT 1	
LED panel fixture (for regips)				EAN code	4750703023535



Model code	90002			LED PANEL FRAME KIT 5	
LED panel frame white 600x600				EAN code	4750703023511

LED PANELS



IP20



Model code	94230			ULTRA SLIM
Power	18 W	Degree of protection	IP20	Ra
Light stream	1200 lm	Beam angle	120°	>80
Color temperature	4000 K	Size	D 225 mm / H 20 mm	Voltage
UGR	<19	Life span	25000 h	220-240 V
		 Ø	205 mm	EAN code
				4750703023351
				Power supply
				+



Model code	94240			ULTRA SLIM
Power	18 W	Degree of protection	IP20	Ra
Light stream	1200 lm	Beam angle	120°	>80
Color temperature	3000 K	Size	D 225 mm / H 20 mm	Voltage
UGR	<19	Life span	25000 h	220-240 V
		 Ø	205 mm	EAN code
				4750703023375
				Power supply
				+



Model code	94250			ULTRA SLIM
Power	24 W	Degree of protection	IP20	Ra
Light stream	1700 lm	Beam angle	120°	>80
Color temperature	4000 K	Size	D 300 mm / H 20 mm	Voltage
UGR	<19	Life span	25000 h	220-240 V
		 Ø	280 mm	EAN code
				4750703023399
				Power supply
				+



Model code	94260			ULTRA SLIM
Power	24 W	Degree of protection	IP20	Ra
Light stream	1700 lm	Beam angle	120°	>80
Color temperature	3000 K	Size	D 300 mm / H 20 mm	Voltage
UGR	<19	Life span	25000 h	220-240 V
		 Ø	280 mm	EAN code
				4750703023405
				Power supply
				+



Model code	94210			ULTRA SLIM
Power	12 W	Degree of protection	IP20	Ra
Light stream	720 lm	Beam angle	120°	>80
Color temperature	4000 K	Size	D 170 mm / H 20 mm	Voltage
UGR	<19	Life span	25000 h	220-240 V
		 Ø	150 mm	EAN code
				4750703023344
				Power supply
				+



Model code	94220			ULTRA SLIM
Power	12 W	Degree of protection	IP20	Ra
Light stream	720 lm	Beam angle	120°	>80
Color temperature	3000 K	Size	D 170 mm / H 20 mm	Voltage
UGR	<19	Life span	25000 h	220-240 V
		 Ø	150 mm	EAN code
				4750703023368
				Power supply
				+



Leduro.com

For orders:

info@lumix.lv

GSM: +371 263 70 850